


Rúrové ohyby bezšvové

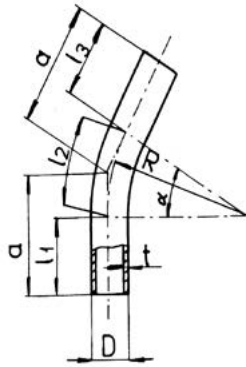

Norma:

OSN 132604.0

Akosti:

P235TR1, S355J2H, P235GH, P265GH, 16Mo3

Polomer ohybu:

R 3DN, R 4DN, R 5DN

DN	ON 13 2621.0 a=90					
	a	l2	L*)	PN 40	PN 63	PN 100
				kg		
10	140	63	263	0,12	-	0,16
15	160	94	294	0,35	-	0,35
20	180	126	326	0,51	-	-
25	200	157	357	0,71	0,71	0,79
32	278	201	501	1,28	-	-
40	310	251	551	1,61	1,79	2,19
50	350	314	614	2,52	2,77	3,80
65	510	408	908	5,22	5,85	7,96
80	570	503	1003	7,59	8,41	11,5
100	800	628	1828	19,9	24,7	33,8
125	900	785	1985	29,8	36,7	51,6
150	1000	942	2142	43,1	59,5	83,5
200	1400	1257	2857	94,6	119	182
250	1600	1571	3171	146	206	320
300	1800	1885	3485	217	335	474
350	2000	2199	5099	392	540	846
400	2400	2513	5413	579	731	1034
500	2800	3142	6042	1033	1317	1801

